

SnapTite®

Hydro-Bell

Introducing: The Snap-Tite® Hydro-Bell Culvert Inlet Device



Numerous advantages make Snap-Tite®
the best **hydraulic** culvert lining **system**:

- Entrance Loss Coefficient (k_e) of approximately 0.2 for outlet control conditions
- An average flow increase of 30% compared to plain end headwalls under inlet control conditions
- As head pressure increases, the Snap-Tite® Hydro-Bell system flow rate increases*
- Same reliable HDPE material and long service life as the Snap-Tite® culvert liner
- “Snaps” onto the inlet end of the Snap-Tite culvert liner
- No special training or tools required to install
- Hydro-Bell makes Snap-Tite® the ideal hydraulic option to line failing RCP culverts
- Available in all Snap-Tite® liner sizes 6” through 63”

The Hydro-Bell inlet device is the first device introduced in recent years that uses newer materials to capitalize on the effects of culvert fluid dynamics. Through this design, it is now possible to maximize the hydraulic efficiency (and/or reduce head loss) of a relined culvert.



Photo courtesy of Indiana Reline, Inc

*Refer to Chart 2




VIEW THE ANIMATION!
To see the animation, visit www.culvert-rehab.com or click the coded image above with your smartphone. If needed, you can download an app by visiting scanlife.com/us/appdownload.html

1-800-CULVERT


www.hydro-bell.com

CHART 1

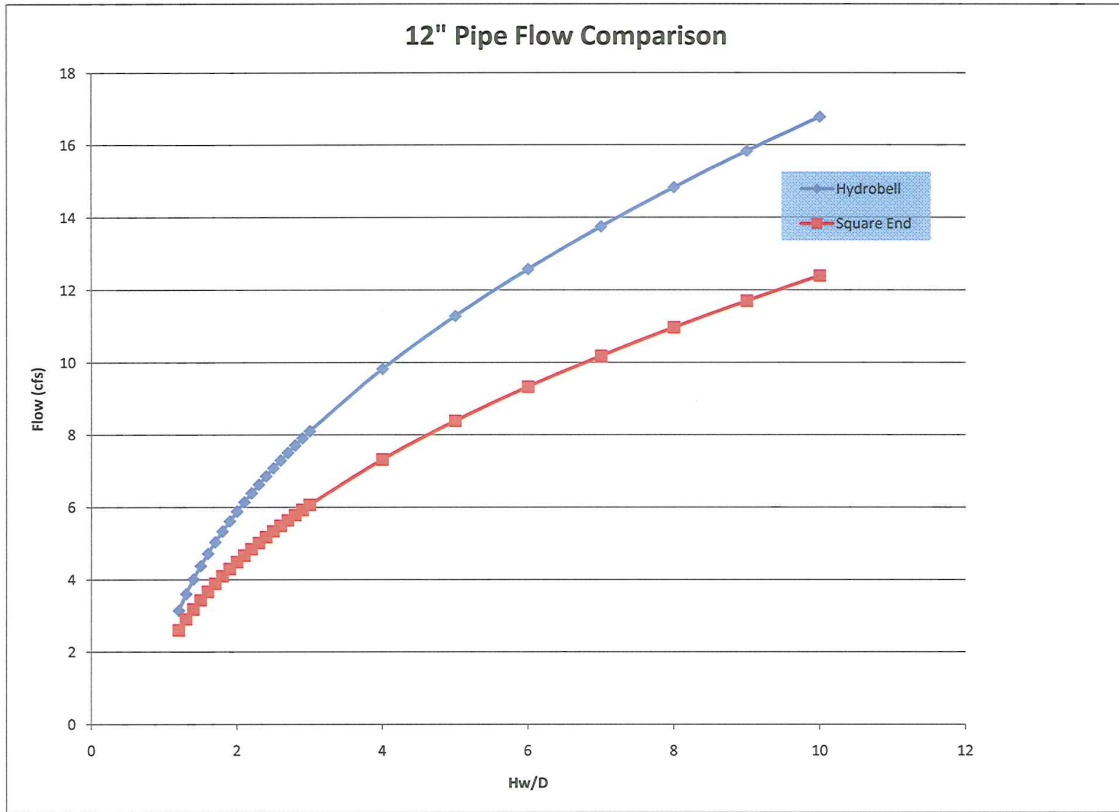

Flow projections based on numerical head discharge constants as developed from independent testing conducted by Utah State University.

CHART 2

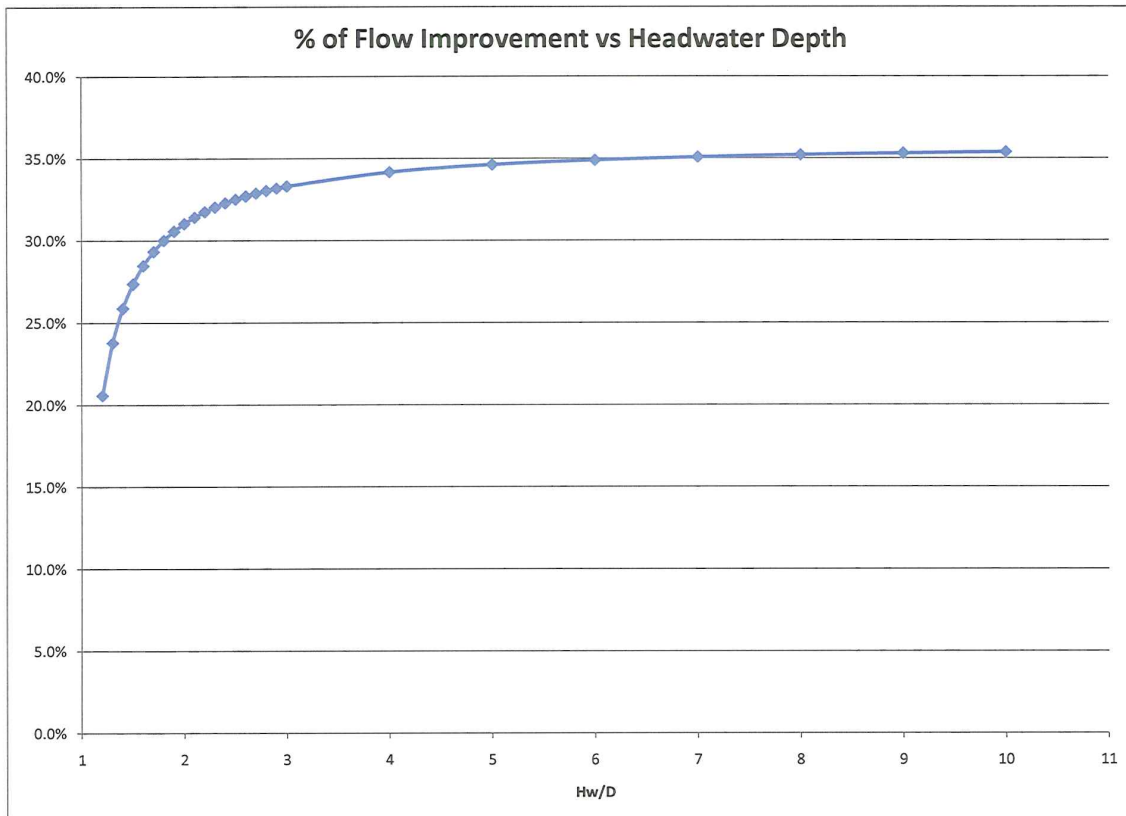

Flow improvement based on headwater height above Hydro-Bell as compared to plain end pipe.